

Part Number: APD3224SYCK-F01

Super Bright Yellow


### Features

- 3.2x2.4mm SMT LED, 2.4mm THICKNESS.
- LOW POWER CONSUMPTION.
- IDEAL FOR BACKLIGHT AND INDICATOR.
- VARIOUS COLORS AND LENS TYPES AVAILABLE.
- PACKAGE : 1500PCS / REEL.
- MOISTURE SENSITIVITY LEVEL : LEVEL 3.
- RoHS COMPLIANT.

### Description

The Super Bright Yellow device is made with DH InGaAlP (on GaAs substrate) light emitting diode chip.

### Package Dimensions

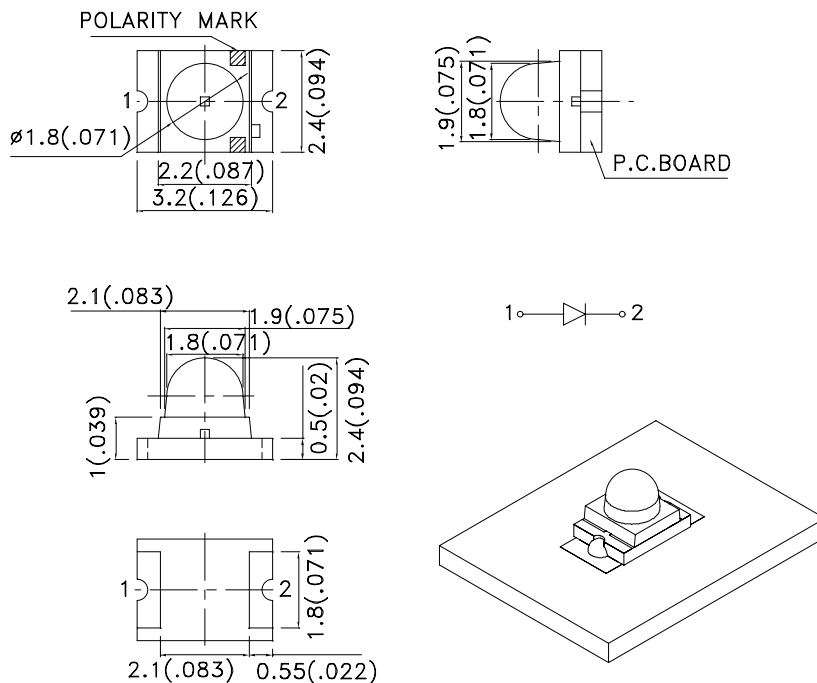

#### Notes:

1. All dimensions are in millimeters (inches).
2. Tolerance is  $\pm 0.1 (0.004)$  unless otherwise noted.
3. Specifications are subject to change without notice.
4. The device has a single mounting surface. The device must be mounted according to the specifications.



## Selection Guide

| Part No.        | Dice                          | Lens Type   | Iv (mcd) [2]<br>@ 20mA |      | Viewing<br>Angle [1] |
|-----------------|-------------------------------|-------------|------------------------|------|----------------------|
|                 |                               |             | Min.                   | Typ. | 2θ1/2                |
| APD3224SYCK-F01 | Super Bright Yellow (InGaAlP) | WATER CLEAR | 110                    | 600  | 20°                  |

Notes:

1. θ1/2 is the angle from optical centerline where the luminous intensity is 1/2 the optical centerline value.
2. Luminous intensity/ luminous Flux: +/-15%.

## Electrical / Optical Characteristics at TA=25°C

| Symbol | Parameter                | Device              | Typ. | Max. | Units | Test Conditions |
|--------|--------------------------|---------------------|------|------|-------|-----------------|
| λpeak  | Peak Wavelength          | Super Bright Yellow | 590  |      | nm    | IF=20mA         |
| λD [1] | Dominant Wavelength      | Super Bright Yellow | 590  |      | nm    | IF=20mA         |
| Δλ1/2  | Spectral Line Half-width | Super Bright Yellow | 20   |      | nm    | IF=20mA         |
| C      | Capacitance              | Super Bright Yellow | 20   |      | pF    | VF=0V;f=1MHz    |
| VF [2] | Forward Voltage          | Super Bright Yellow | 2    | 2.5  | V     | IF=20mA         |
| IR     | Reverse Current          | Super Bright Yellow |      | 10   | uA    | VR=5V           |

Notes:


- 1.Wavelength: +/-1nm.
2. Forward Voltage: +/-0.1V.

## Absolute Maximum Ratings at TA=25°C

| Parameter                | Super Bright Yellow | Units |
|--------------------------|---------------------|-------|
| Power dissipation        | 75                  | mW    |
| DC Forward Current       | 30                  | mA    |
| Peak Forward Current [1] | 175                 | mA    |
| Reverse Voltage          | 5                   | V     |
| Operating Temperature    | -40°C To +85°C      |       |
| Storage Temperature      | -40°C To +85°C      |       |






Note:

1. 1/10 Duty Cycle, 0.1ms Pulse Width.

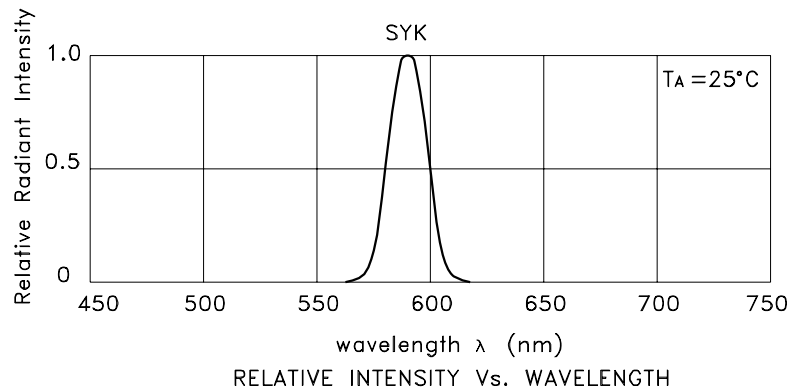


Super Bright Yellow

APD3224SYCK-F01

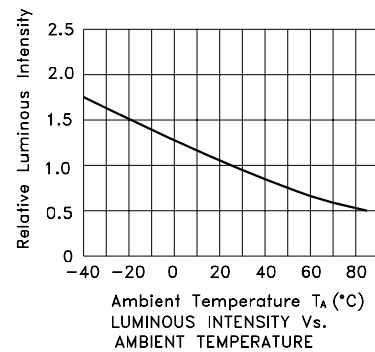

## APD3224SYCK-F01


Reflow Soldering Profile For Lead-free SMT Process.

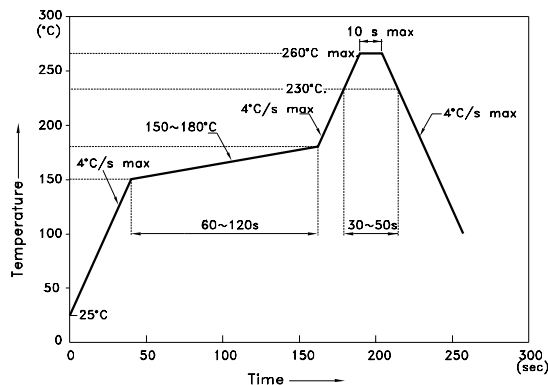


### NOTES:

1. We recommend the reflow temperature 245°C(+/-5°C). The maximum soldering temperature should be limited to 260°C.
2. Don't cause stress to the epoxy resin while it is exposed to high temperature.
3. Number of reflow process shall be 2 times or less.

## Recommended Soldering Pattern (Units : mm; Tolerance: $\pm 0.1$ )

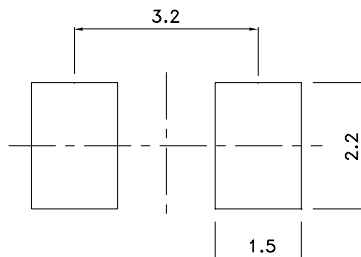


## Tape Specifications (Units : mm)

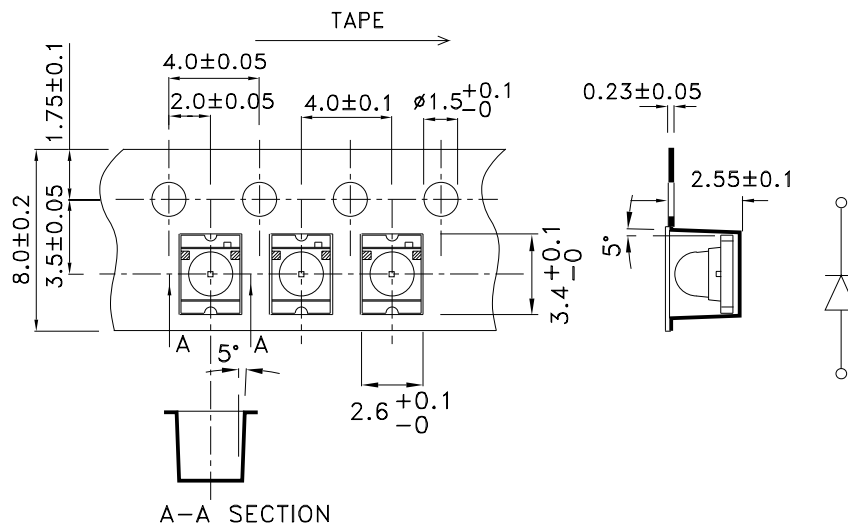

## PACKING & LABEL SPECIFICATIONS

APD3224SYCK-F01

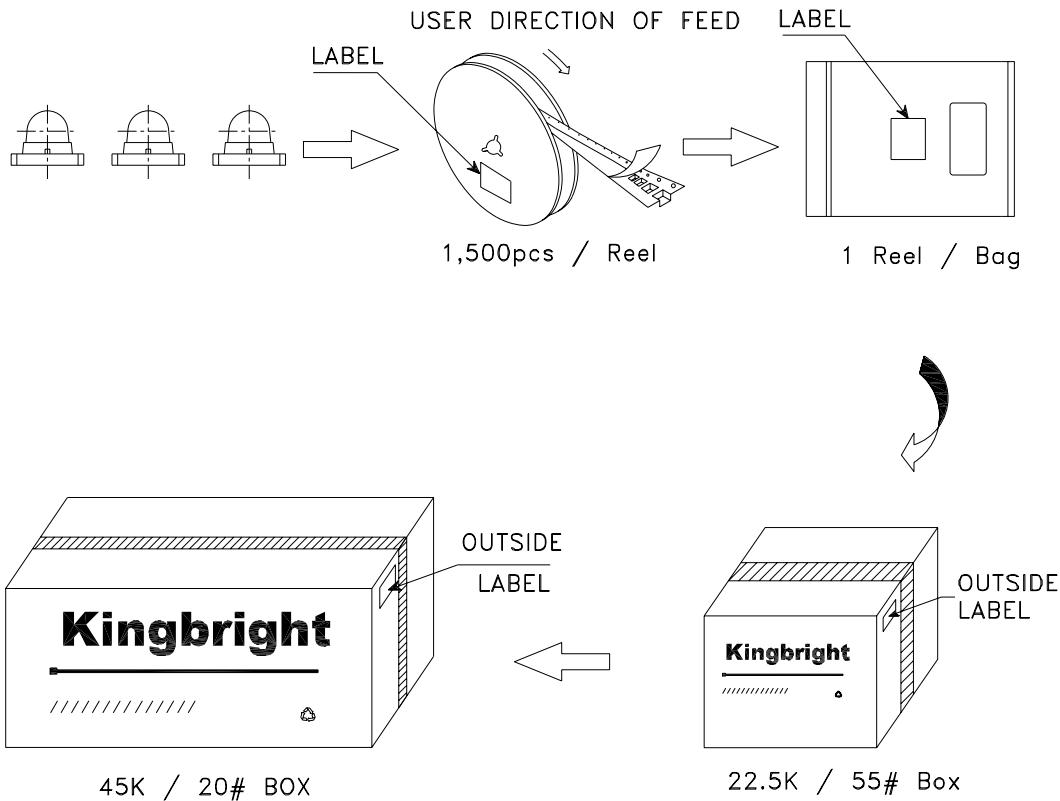

|                                                                                      |                                               |
|--------------------------------------------------------------------------------------|-----------------------------------------------|
| <b>Kingbright</b>                                                                    |                                               |
| P/NO: APD3224xxx                                                                     |                                               |
| QTY: 1,500 pcs                                                                       | Q.C. <div>Q C<br/>xx xx xxxx<br/>PASSED</div> |
| S/N: XXXX                                                                            |                                               |
| CODE: XXX                                                                            |                                               |
| LOT NO:                                                                              |                                               |
|  |                                               |
| xxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxx                                                     |                                               |
| MADE IN CHINA                                                                        | RoHS Compliant                                |